

HYBRI-FLEX® EQ



- Topcoat** – Clear Armor Top
- Grout Coat** – Clear Dur-A-Glaze #4
- Second Quartz Broadcast** – Clear Dur-A-Glaze #4 with matching Decorative Quartz Broadcast
- Quartz Broadcast** – Q28 or Q11 Decorative Quartz Broadcast into the SL
- Body Coat** – Pigmented Poly-Crete SL
- Primer** – (optional) Pigmented Poly-Crete TF Plus (only required if the substrate is very porous)
- Prepared Substrate** – Concrete Surface Profile (CSP) of 3-4

SYSTEM OVERVIEW

HYBRI-FLEX EQ is a seamless, nominal 3/16" – 1/4" decorative quartz floor system featuring a moisture tolerant self-priming and self-leveling body coat topped with a double broadcast of decorative quartz aggregate and finished with an Armor Top topcoat for a chemical, UV, and wear-resistant urethane topcoat.

FEATURES & BENEFITS

• Self-Leveling

A uniform, more even floor system

• Abrasion Resistance

Armor Top topcoat delivers superior toughness

• Moisture Mitigating

Can be applied to high moisture concrete and is capable of handling high soluble ion (salts) contamination - reducing the risk of moisture related coating failure

• Decorative

Multiple blends of pigmented quartz aggregate for a unique look

• Slip Resistant

Textured finishes aid in a safer floor, even when wet

• Thermal Cycling Resistant

Usable in environments with thermal cycling or changes in temperature

COMMON USE SITES


- Cleanrooms
- Laboratories
- Pharmaceutical
- Lobbies
- Restrooms
- Retail
- Schools
- Supermarkets




COLORS

Available in a wide variety of standard Q28 quartz aggregate blends. For a full list of available colors visit **DUR-A-FLEX.COM**.

Q28 COLORS

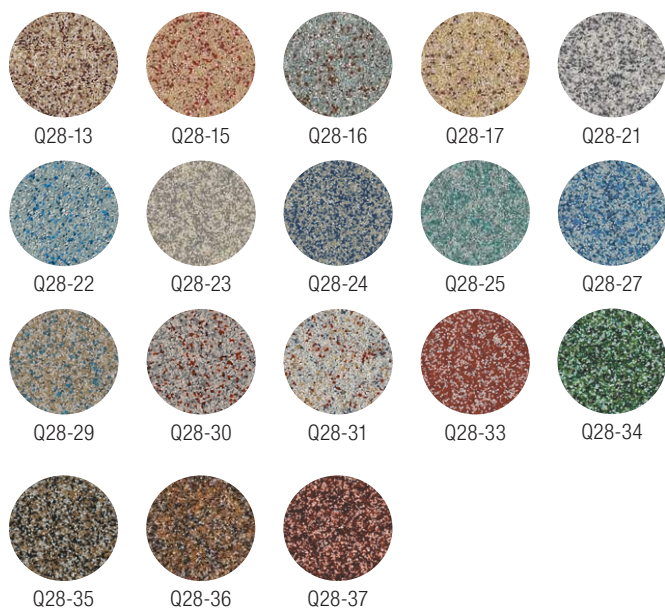

Q11 COLORS

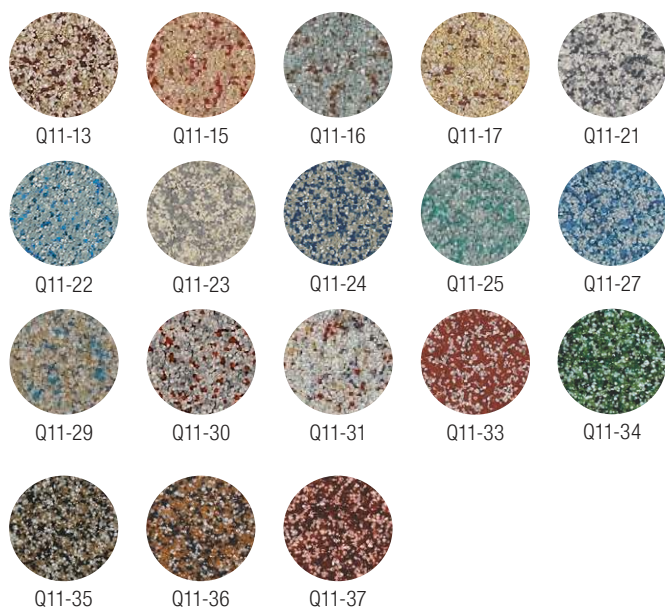

IMPORTANT!

Before using DUR-A-FLEX products, read and understand its accompanying Safety Data Sheet & Application Instructions for important safety information.

STANDARD TERMS AND CONDITIONS OF SALE, INCLUDING STANDARD WARRANTY APPLY - VISIT **DUR-A-FLEX.COM** FOR THE LATEST VERSION

v1