POLY-CRETE SLB





SYSTEM OVERVIEW

POLY-CRETE SLB is a 100% solids, seamless 3/16" cementitious-urethane self-leveling flooring system with a flintshot quartz aggregate broadcast, providing a slip-resistant finish. The body coat is resistant to thermal shock and is moisture mitigating which can eliminate the use of a primer in most environments, while topcoat options offer a wide selection of chemical and abrasion resistant finishes.

FEATURES & BENEFITS

Self Leveling

A uniform, more even floor system

Moisture Mitigating

Installs in more environments, including those with high moisture levels up to 99% RH

· Non Slip

Texture from the aggregate broadcast aids in a safer floor, even when wet

Thermal Shock Resistant

Usable in harsh environments with high thermal cycling or rapid changes in temperature

COMMON USE SITES

- Kitchens
- Warehouses
- High Traffic Areas
- Storage
- Light Manufacturing

- Food Processing
- Breweries/Distilleries










COLORS

Available in standard solid color topcoats. For a full list of available colors visit **DUR-A-FLEX.COM**



Poly-Crete MD, MDB, SLB, HF systems and Poly-Crete TF Plus topcoat feature a matte finish. For UV stability use with one of these topcoats: Accelera, Shop Floor, Armor Top, and Color-Fast.

*Poly-Crete Color-Fast in these colors require a grout coat of Poly-Crete TF Plus to ensure consistent color.

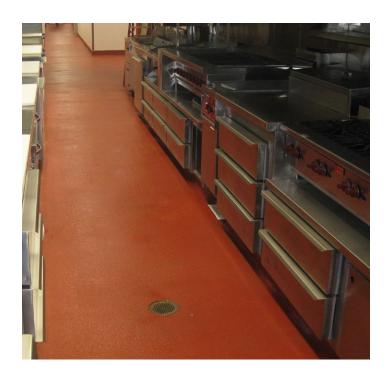





IMPORTANT!

Before using DUR-A-FLEX products, read and understand its accompanying Safety Data Sheet & Application Instructions for important safety information.

STANDARD TERMS AND CONDITIONS OF SALE, INCLUDING STANDARD WARRANTY APPLY - VISIT DUR-A-FLEX.COM FOR THE LATEST VERSION

